

# (12) UK Patent Application (19) GB (11) 2 394 921 (13) A

(43) Date of A Publication 12.05.2004

(21) Application No: 0226042.0

(22) Date of Filing: 07.11.2002

(71) Applicant(s):  
Autoliv Development AB  
(Incorporated in Sweden)  
Patents Department, S-447 83 Vargarda,  
Sweden

(72) Inventor(s):  
Mats Berntsson  
Hakan Jaconelli  
Fredrik Kjell

(74) Agent and/or Address for Service:  
Forrester Ketley & Co  
Forrester House, 52 Bounds Green Road,  
LONDON, N11 2EY, United Kingdom

(51) INT CL<sup>7</sup>:  
B60R 21/16 21/20



(52) UK CL (Edition W ):  
B7B BSBCC BSBCR B601

(56) Documents Cited:  
US 5984348 A US 20020153713 A1  
US 20020140211 A1 US 20020036395 A1

(58) Field of Search:  
UK CL (Edition V ) B7B  
INT CL<sup>7</sup> B60R  
Other: ONLINE: WPI, EPODOC, JAPIO

(54) Abstract Title: A vehicle curtain type air bag rolled up when not in use

(57) A vehicle curtain type air bag 2 formed from at least two super-imposed layers has an attachment edge 6 provided with mounting elements 14 for mounting the inflatable curtain for deployment beside an interior surface of the vehicle cabin. There is also a deployment edge 8 spaced apart from the attachment edge, where the curtain is divided into a plurality of cells 32 by partitions 30 extending substantially transversely to a gas-flow passage 28 which extends along the attachment edge. Each mounting element is positioned intermediate an adjacent pair of partitions. When not in use the inflatable curtain is at least partially rolled-up with its deployment edge within the roll, and the roll being adjacent part of an outboard layer, with the corresponding inboard layer forming the exterior of the roll. There is also disclosed a method of preparing such an air bag.

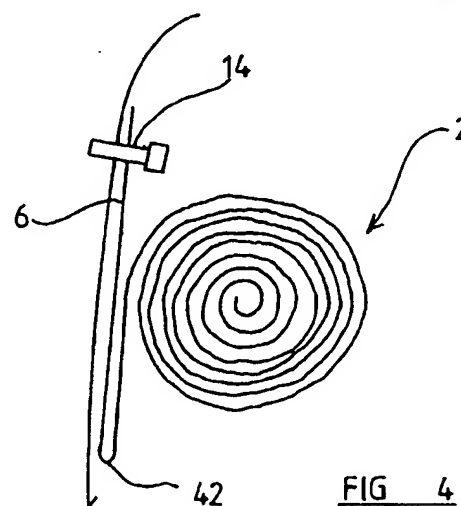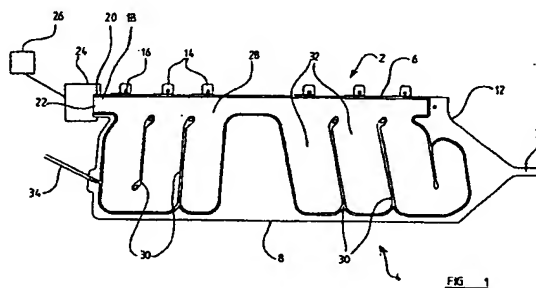

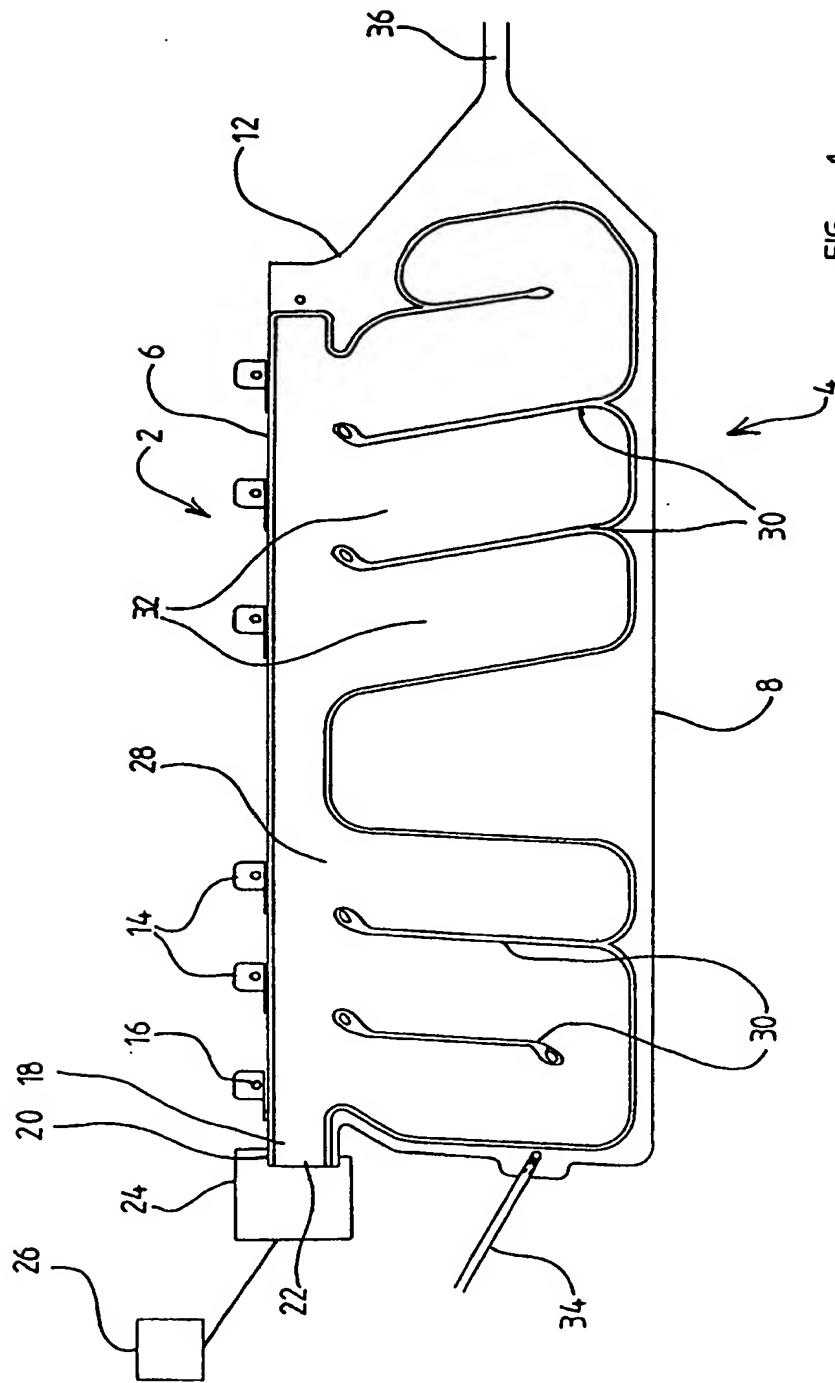
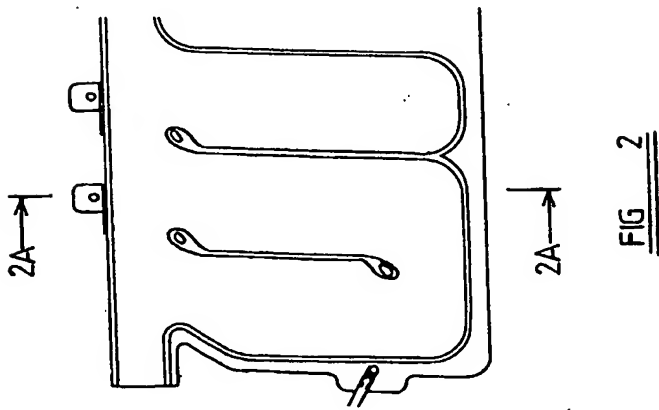
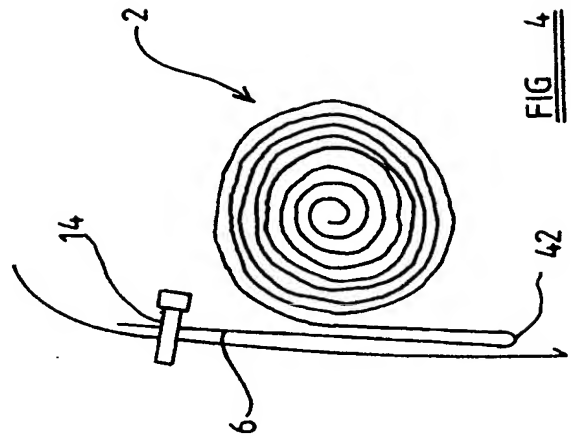
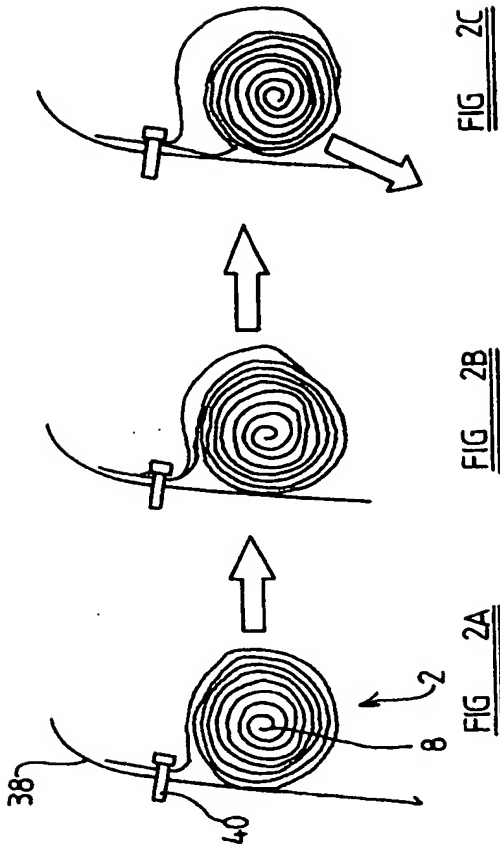


FIG 1



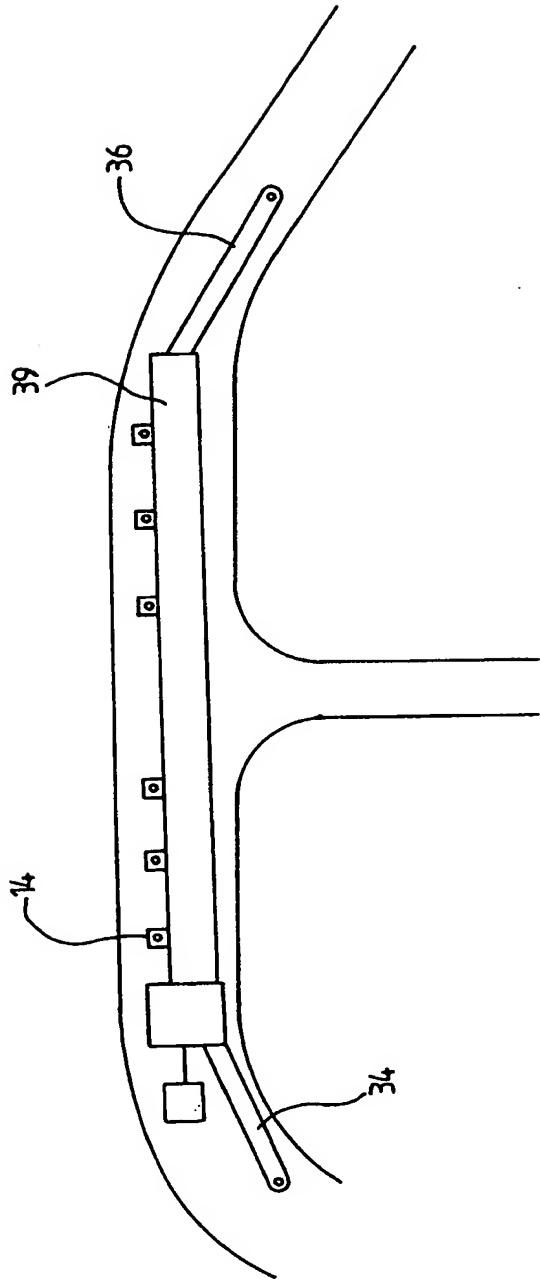


FIG 3

## 5 DESCRIPTION OF INVENTION

10 **"IMPROVEMENTS IN OR RELATING TO AN AIR-BAG  
ARRANGEMENT, AND A METHOD OF PREPARING AND  
MOUNTING AN AIR-BAG"**

15 **THE PRESENT INVENTION** relates to an air-bag arrangement, and to a  
method of preparing and mounting an air-bag in a vehicle cabin.

20 Various designs of "inflatable curtain" air-bags have been proposed for  
use in vehicles. Such inflatable curtains are air-bags which are initially stored  
within the roof lining of the vehicle immediately above the door openings, the  
air-bag inflating, in response to a signal from an appropriate sensor, to form a  
"curtain" lying adjacent a side window of the vehicle. Typically such an  
air-bag is provided with a generally rectangular inflatable region, the upper  
edge of which is provided with mounting lugs by means of which the air-bag  
may be mounted in position. The inflatable region may be divided into a  
25 plurality of separate inflatable cells, and an internal gas-flow passage is  
provided to direct gas from a gas generator to the cells that are to be inflated.

It is known in the art to roll up an inflatable curtain and provide it within  
a motor vehicle in an "inboard" manner, that is, with the roll mounted towards

the vehicle cabin or compartment interior. Upon inflation of such an "inboard" rolled inflatable curtain, the unrolling inflatable curtain tends to move towards the interior of the motor vehicle, and may strike the head of an occupant in an undesirable manner if the occupant is in an "out of position" situation, for  
5 example, if the head of the occupant is placed against the side window of the motor vehicle.

The present invention seeks to provide an improved air-bag, and a method for preparing and mounting an air-bag in a vehicle.

10

According to this invention there is provided an air-bag arrangement comprising an inflatable curtain formed from at least two super-imposed layers and having an attachment edge provided with a plurality of mounting elements for mounting the inflatable curtain in a vehicle cabin for deployment beside an  
15 interior surface of the vehicle cabin, with one layer being an inboard layer, and the other layer being an outboard layer, the inflatable curtain also having a deployable edge spaced from the attachment edge, a gas-flow passage extending along the attachment edge, and between the attachment edge and the deployable edge an inflatable region which is divided into a plurality of cells by  
20 partitions extending substantially transversely relative to the axis of the gas-flow passage, the cells communicating with the gas-flow passage, each mounting element being positioned intermediate an adjacent pair of partitions, the deployable edge of the inflatable curtain being movable from a stowed position to a deployed position by inflation of the inflatable region of the  
25 inflatable curtain, the inflatable curtain being at least partially rolled-up with its deployable edge within the roll, with the roll being adjacent part of the outboard layer with the inboard layer forming the exterior of the roll.

Conveniently the partitions are seams.

Advantageously the seams are formed by stitching.

- 5           Alternatively the air-bag is formed from woven fabric, and the seams are formed integrally with the air-bag.

As a further alternative the seams are formed by adhesion.

- 10           Preferably the mounting elements are each located substantially centrally of a respective adjacent pair of partitions.

Conveniently a portion of the outboard layer of the inflatable curtain extends from the attachment edge and then turns to join the roll.

- 15           Advantageously straps extend from spaced-apart points on the air-bag, each strap having a free end adapted to be secured to a respective anchoring point formed on the interior of the vehicle cabin.

- 20           Preferably the air-bag is enclosed in a sleeve or housing.

Conveniently parts of the air-bag extend through apertures formed in the sleeve or housing such that said parts protrude from the sleeve or housing.

- 25           Advantageously the air-bag is connected to a gas generator.

According to another aspect of this invention there is provided a method of preparing an air-bag for a vehicle cabin for deployment beside an interior surface of the vehicle cabin, the air-bag comprising an inflatable curtain formed

from at least two super-imposed layers and having an attachment edge provided with a plurality of mounting elements for mounting the inflatable curtain in a vehicle cabin for deployment beside an interior surface of the vehicle cabin, with one layer being an inboard layer, and the other layer of fabric being an outboard layer, the inflatable curtain also having a deployable edge spaced from the attachment edge, a gas-flow passage extending along the attachment edge, and between the attachment edge and the deployable edge an inflatable region which is divided into a plurality of cells by partitions extending substantially transversely relative to the axis of the gas-flow passage, the cells communicating with the gas-flow passage, each mounting element being positioned intermediate an adjacent pair of partitions, the deployable edge of the inflatable curtain being movable from a stowed position to a deployed position by inflation of the inflatable region of the inflatable curtain, the method comprising the steps of rolling at least part of the inflatable curtain with its deployable edge within the roll, with the roll being adjacent part of the outboard layer and with the inboard layer forming the exterior of the roll.

Preferably the air-bag is folded such that a portion of the outboard layer of the inflatable curtain extends from the attachment edge and then turns to join the roll.

Advantageously the method further comprises the step of encasing the air-bag in a sleeve or housing.

Preferably the method further comprises the step of locating parts of the air-bag to extend through apertures formed in the sleeve or housing such that said parts protrude from the sleeve or housing.



Conveniently the method further comprises the step of connecting the air-bag to a gas generator.

In order that the invention might be more readily understood, and so that  
5 further features thereof may be appreciated, embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings in which:

FIGURE 1 is a diagrammatic side view of an air-bag according to a first  
10 embodiment of the invention in a condition prior to preparation,

FIGURE 2 is an enlarged detail of Figure 1,

FIGURE 2A is a view corresponding to the cross-section 2A-2A shown  
15 in Figure 2 when the air-bag of Figure 2 is prepared according to the method of the present invention,

FIGURE 2B corresponds to Figure 2A at an initial stage of inflation,

20 FIGURE 2C corresponds to Figure 2A at a further stage of inflation,

FIGURE 3 is diagrammatic side-elevational view corresponding to the air-bag of Figure 2A, and

25 FIGURE 4 shows an air-bag prepared according to a second embodiment of the method of the present invention.

Referring initially to Figure 1, an air-bag 2 embodying the invention is illustrated in the form of an inflatable curtain. The air-bag is formed from two

superimposed layers of fabric, each layer of fabric having the same outer peripheral shape. The two layers of fabric may be secured together to form seams by stitching. Alternatively, the entire bag may be constructed using a one piece weaving technique, familiar to those skilled in the art, in which the seams  
5 are integrally woven into the bag. The two layers could as a further alternative be secured together using adhesive to form the seams, or using any other suitable securing method known in the art. As will become clear one layer of fabric is an inboard layer, and the other layer is an outboard layer.

10 The inflatable curtain has a substantially rectangular main inflatable region 4, defined by four side edges: an upper side edge 6, lower side edge 8 and two opposed side edges 10 and 12. The upper and lower side edges 6, 8 are longer than the two opposed side edges 10, 12, and the lower side edge 8 extends substantially parallel to the upper side edge 6.

15

The upper side edge 6 constitutes an attachment edge which is provided with a plurality of mounting elements in the form of mounting tabs 14. Each of the mounting tabs 14 has a hole 16 formed therethrough to facilitate the mounting of the air-bag in the cabin of a vehicle. The mounting tabs 14 are  
20 located on the upper side edge 6 of the substantially rectangular main inflatable region of the air-bag at evenly spaced intervals.

A projecting portion 18 is formed at one end of the substantially rectangular main inflatable region 4, and extends from an upper corner of the  
25 region 4 in a direction parallel to the upper side edge 6 of the air-bag and perpendicular to a side edge 10 of the air-bag. The projecting portion 18 is formed from the fabric used to form the main inflatable region 4 and thus the air-bag is formed integrally.

The projecting portion 18 defines a substantially rectangular shaped gas inlet throat 20. One end 22 of the gas inlet throat 20, which is remote from the rectangular region of the air-bag, is connected to a gas generator 24. This gas generator is connected to a collision and roll-over sensor 26. The other end of the gas inlet throat 20 communicates with a gas-flow passage 28 formed in the interior of the rectangular main inflatable region 4 of the air-bag. The gas-flow passage 28 is generally linear and runs along the top of the air-bag adjacent to the upper side edge 6. The gas-flow passage 28 defines an axis. An inner gas-flow duct of metal, plastic or fabric may be provided within the gas-flow passage 28 to protect the fabric of the air-bag from the effects of the aggressive flow of gas from the gas generator.

A plurality of partitions in the form of substantially vertically extending seams 30 define a plurality of substantially parallel inflatable cells 32. The seams 30 extend substantially transversely of the axis of the gas-flow passage 28, and each cell has a substantially vertical axis which intersects the lower edge 8 of the rectangular region of the air-bag. The top of each of the cells 32 communicates with the gas-flow passage 28. The inflatable cells 32 are, in the illustrated embodiment, in a row and are generally rectangular. When inflated, these cells 32 each adopt a substantially cylindrical profile.

The mounting tabs 14 are each positioned on the upper side edge 6 intermediate a pair of seam 30 defining a cell 32. Preferably each mounting tab 14 is located on the upper side edge 6 substantially midway between the adjacent seams 30 defining a respective cell 32. Each cell 32 has a respective mounting tab 14 so that there is an equal number of cells 32 and tabs 14.

A pair of straps 34, 36 extend from two spaced apart points, each point being on a respective side edge 10, 12 of the air-bag 2. Each strap has a free end which is adapted to be secured or mounted to a respective anchoring point formed on the interior of the cabin of a vehicle in which the air-bag is to be mounted.

In the event that the vehicle in which the air-bag 2 is mounted is involved in a side-impact collision or a rollover, or in response to other pre-determined conditions, the sensor 26 generates a signal which is sent to the gas generator 24, causing the gas generator to generate and discharge gas. The gas flows through the gas inlet throat 20 and along the gas-flow passage 28 and hence into the cells 32, to inflate the cells. The air-bag thus becomes inflated.

As the cells inflate, they adopt a substantially cylindrical profile, resulting in the lower edge of the bag 8 decreasing in length. This reduction in length creates a line of tension between the anchoring points to which the straps 34, 36 are secured which acts to hold the bag in place beside the interior surface of the vehicle cabin. The substantially vertical axes of the cells 32 intersect this line of tension.

It has been found, surprisingly, that with the mounting tabs 14 located between adjacent seams 30, and above the cells 32, a good unrolling or deployment characteristic is achieved. It has been found that with mounting tabs located in alignment with the seams separating the cells the inflatable curtain can, during deployment, self-lock and not come down at all.

When the air-bag is inflated, one of the superimposed layers of fabric, the "inboard" layer, is on the side of the inflatable curtain closest to the interior

of the cabin, and the other layer of fabric, the "outboard" layer, is closest to the side of the vehicle.

Referring now to Figure 2A, an air-bag 2 prepared according to the  
5 method of the present invention is shown mounted to the interior wall or surface 38 of a vehicle cabin.

The air-bag of Figure 1 has been rolled-up about the deployable lower side edge 8. The lower side edge 8 of the air-bag thus lies in a stowed position  
10 at the middle of the roll along its central axis. The roll has been formed so that the roll is located adjacent the outboard layer of fabric, with the inboard layer of fabric forming the exterior of the roll.

The rolled-up air-bag has been encased within a sleeve or housing 39 as  
15 best seen in Figure 3. The mounting tabs 14 extend through apertures formed in the upper side edge of the sleeve or housing 39, such that the mounting tabs 14 protrude from the sleeve or housing 39 and the straps 34, 36 extend through apertures formed in the ends of the sleeve or housing 39 such that the straps 34, 36 protrude from the sleeve or housing 39. The air-bag is connected  
20 to a gas generator 24 which is located within the roof lining of the vehicle. The gas generator is connected to a collision and roll-over sensor 26.

Returning to Figure 2A, the air-bag has been mounted to the vehicle with the roll of the air-bag adjacent the interior side wall or surface of the  
25 vehicle cabin. This means that the direction of wind of the roll mounted on a left-hand side of the vehicle is clockwise (travelling from the outside of the roll in towards its middle) and the roll mounted on a right-hand side of the vehicle is anti-clockwise (travelling from the outside of the roll towards its middle) as

seen when looking down the axis of the roll from the vantage point of the back of the vehicle looking forwards.

5 The air-bag 2 is mounted adjacent an interior wall or surface 38 of the vehicle near the roof-line of the vehicle by means of fixings 40 which pass the mounting tabs 14.

10 In the illustrated embodiment, the free end of a first strap 36 is attached to the "A" post, and the free end of a second strap 34 is attached to the "B" post, although the straps may be attached between any of the "A", "B", "C" or "D" posts, as appropriate. The air-bag 2 may be sized appropriately to cover the side wall or surface of the vehicle cabin between any two of the "A", "B", "C" or "D" posts as desired.

15 Figure 2B shows the air-bag 2 in a initial stage of inflation. As can clearly be seen, gas has started to flow into the air-bag 2, and the inflatable region 4 of the air-bag has begun to fill. As a result, the air-bag begins to deploy or unroll, and is prevented from rolling upwards by the secure fixing of the mounting tabs 14. The early stages of inflation of the air-bag have caused  
20 the air-bag to rupture and break through the sleeve or housing 39.

Figure 2C shows the air-bag 1 in a later stage of inflation, in which the air-bag has inflated further and the curtain has begun to unroll. The air flowing into the air-bag 2 forces the curtain to unroll in a direction which has a  
25 component directed towards the interior wall or surface 38 of the vehicle, that is, away from the interior of the vehicle cabin and towards the exterior of the vehicle, as indicated by the arrow marked "A". The roll is effectively trapped between that part of the inflatable curtain that has inflated and the side of the vehicle.

It is to be appreciated that the air-bag will further unroll until it is fully deployed. The lower side edge 8 hence defines a deployable edge which moves from a stowed position in the middle of the roll to a deployed position at the lower edge of the inflated air-bag. If the head of the occupant is in an out of position situation, that is, with the head of the occupant displaced towards or placed against the side window, the unrolling outboard roll would try to move downwards into the space between the head of the occupant and the window, thus forcing the head of the occupant back into the cabin and helping to reduce the risk of the head of the occupant from moving out of the cabin, for example through a broken window.

As mentioned earlier, when the cells are inflated, they adopt a substantially cylindrical profile, resulting in the lower edge of the bag decreasing in length. This reduction in length creates a line of tension between the anchoring points to which the straps 36, 38 are secured which acts to hold the air-bag 2 in place. The substantially vertical axes of the cells 32 intersect this line of tension.

Figure 4 shows an alternative embodiment of an air-bag according to the present invention mounted in a vehicle, in which only part of the air-bag 2 is rolled up. The roll is a roll that does not commence at the lower edge of the inflatable curtain, but instead starts at a point on the inboard layer of fabric above the lower edge. Thus there is more of the outboard layer of fabric remaining above the roll 42 than there is of the inboard layer of fabric. The roll is located on the inboard side of the rest of the inflatable curtain, but the part of the inflatable curtain between the roll and the upper side edge 6 hangs down and is folded up about a lower-most fold-line 42 located beneath the roll. Again the roll lies adjacent part of the outboard fabric layer with the inboard

fabric layer forming the exterior of the completed roll. This air-bag is also encased in a sleeve or housing 39 and is similarly connected to a gas-generator 24 and sensor 26 arrangement (not shown).

5        It is to be appreciated that this air-bag will have a similar inflation characteristic to that illustrated in Figures 2A-2C, the difference being that the region of the air-bag depending downwardly from the fixing tab 14 to the fold 42 will inflate first, moving the entire roll downwardly before the roll of the air-bag 2 unrolls. This may tend to cause the roll to move inwardly towards  
10 the compartment of the vehicle, but this movement may be prevented by strategically located elements of trim.

      Whilst the invention has been described with reference to preferred embodiments, it is to be appreciated that many different embodiments may be  
15 devised without departing from the scope of the invention. For example, the number of inflatable cells and the configuration of the inflatable cells may be changed substantially according to the specific design of the motor vehicle in which the inflatable curtain is to be mounted. Alternatively, the main inflatable region may simply be undivided, that is, it may simply be a single inflatable  
20 region which is not divided into separate inflatable cells as in the illustrated embodiments.

      As a further alternative, the air-bag could be positioned to unroll over or in front of a different wall or surface of the vehicle cabin, e.g. it could be  
25 positioned to unroll in front of the windscreen or rear window.

      In the present Specification "comprises" means "includes or consists of" and "comprising" means "including or consisting of".



The features disclosed in the foregoing description, or the following Claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process  
5 for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

## CLAIMS:

- 5     1.     An air-bag arrangement comprising an inflatable curtain formed from at least two super-imposed layers and having an attachment edge provided with a plurality of mounting elements for mounting the inflatable curtain in a vehicle cabin for deployment beside an interior surface of the vehicle cabin, with one layer being an inboard layer, and the other layer being an outboard layer, the  
10     inflatable curtain also having a deployable edge spaced from the attachment edge, a gas-flow passage extending along the attachment edge, and between the attachment edge and the deployable edge an inflatable region which is divided into a plurality of cells by partitions extending substantially transversely relative to the axis of the gas- flow passage, the cells communicating with the  
15     gas-flow passage, each mounting element being positioned intermediate an adjacent pair of partitions, the deployable edge of the inflatable curtain being movable from a stowed position to a deployed position by inflation of the inflatable region of the inflatable curtain, the inflatable curtain being at least partially rolled-up with its deployable edge within the roll, with the roll being  
20     adjacent part of the outboard layer with the inboard layer of fabric forming the exterior of the roll.
2.     An air-bag arrangement according to Claim 1 wherein the partitions are  
25     seams.
3.     An air-bag arrangement according to Claim 2 wherein the seams are formed by stitching.

4. An air-bag arrangement according to Claim 2 wherein the air-bag is formed from one piece woven fabric, and the seams are formed integrally with the air-bag.
- 5 5. An air-bag arrangement according to Claim 2 wherein the seams are formed by adhesion.
6. An air-bag arrangement according to any one of the preceding Claims wherein the mounting elements are each located substantially centrally of a  
10 respective adjacent pair of partitions.
7. An air-bag arrangement according to any of the preceding Claims wherein a portion of the outboard layer of the inflatable curtain extends from the attachment edge and then turns to join the roll.  
15
8. An air-bag arrangement according to any one of the preceding Claims wherein straps extend from spaced-apart points on the air-bag, each strap having a free end adapted to be secured to a respective anchoring point formed on the interior of the vehicle cabin.  
20
9. An air-bag according to any one of the preceding Claims wherein the air-bag is enclosed in a sleeve or housing.
10. An air-bag according to Claim 10 wherein parts of the air-bag extend  
25 through apertures formed in the sleeve or housing such that said parts protrude from the sleeve or housing.
11. An air-bag according to any one of the preceding Claims wherein the air-bag is connected to a gas generator.

12. A method of preparing an air-bag for a vehicle cabin for deployment beside an interior surface of the vehicle cabin, the air-bag comprising an inflatable curtain formed from at least two super-imposed layers and having an attachment edge provided with a plurality of mounting elements for mounting the inflatable curtain in a vehicle cabin for deployment beside an interior surface of the vehicle cabin, with one layer being an inboard layer, and the other layer being an outboard layer, the inflatable curtain also having a deployable edge spaced from the attachment edge, a gas-flow passage extending along the attachment edge, and between the attachment edge and the deployable edge an inflatable region which is divided into a plurality of cells by partitions extending substantially transversely relative to the axis of the gas-flow passage, the cells communicating with the gas-flow passage, each mounting element being positioned intermediate an adjacent pair of partitions, the deployable edge of the inflatable curtain being movable from a stowed position to a deployed position by inflation of the inflatable region of the inflatable curtain, the method comprising the steps of rolling at least part of the inflatable curtain with its deployable edge within the roll, with the roll being adjacent part of the outboard layer and with the inboard layer forming the exterior of the roll.

13. A method according to Claim 12 wherein the air-bag is folded such that a portion of the outboard layer of the inflatable curtain extends from the attachment edge and then turns to join the roll.

25

14. A method according to any one of the preceding Claims, the method further comprising the step of encasing the air-bag in a sleeve or housing.

15. A method according to Claim 14 the method further comprising the step of locating parts of the air-bag to extend through apertures formed in the sleeve or housing such that said parts protrude from the sleeve or housing.
- 5 16. A method according to any one of Claims 12 to 15 the method further comprising the step of connecting the air-bag to a gas generator.
17. An air-bag substantially as herein described with reference to and as shown in Figures 1 to 3 of the accompanying drawings.
- 10 18. An air-bag substantially as herein described with reference to and as shown in Figures 1 to 3 of the accompanying drawings as modified by Figure 4.
19. A method of preparing an air-bag substantially as herein described with  
15 reference to Figures 1 to 4 of the accompanying drawings.
20. Any novel feature or combination of features disclosed herein.



18



INVESTOR IN PEOPLE

Application No: GB 0226042.0  
Claims searched: 1 to 16

Examiner: Peter Gardiner  
Date of search: 22 January 2003

## Patents Act 1977 : Search Report under Section 17

### Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
Y	1-5,9,11,12,14,16	US 20020036395 A1 (BAKSHSH <i>et al</i> ) See figures 5B, 6B, 7B-7D, and paragraphs 31 and 32.
Y	1-3,8,9,11,12,14,16	US 20020153713 A1 (FISCHER) See figures 2 and 3, and paragraphs 17 and 18.
Y	1,9,12,14	US 20020140211 A1 (TAKAHARA) See attachment points 11g and tearable bag 17.
A		US 5984348 (SPECHT <i>et al</i> ) See figure 1 and column 2 lines 53 to 56.

### Categories:

X Document indicating lack of novelty or inventive step	A Document indicating technological background and/or state of the art.
Y Document indicating lack of inventive step if combined with one or more other documents of same category.	P Document published on or after the declared priority date but before the filing date of this invention.
& Member of the same patent family	E Patent document published on or after, but with priority date earlier than, the filing date of this application.

### Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC<sup>v</sup>:

B7B

Worldwide search of patent documents classified in the following areas of the IPC<sup>7</sup>:

B60R

The following online and other databases have been used in the preparation of this search report:

WPI, EPODOC, JAPIO